

Fin color:



Black White

**Line Voltage**

**R-30 S**

40 degree beam



120V / 220V / 277V line current

Medium Screw Base E26/E27

50,000 hour rated life

**Replaces:**

75W Incandescent /  
26W Compact Fluorescent

**Par 30 LED Lamp**

14 Watt typical

**Light Output**

680-705 Lumen (useful)

**Indoor/Outdoor**

wet and dry locations

**White (3) Color Temperatures:**

- Warm** White (2700K)
- Neutral** White (3500K)
- Cool** White (4500K)

**Operating:**

Open Air Fixtures -4°F to 105°F  
-20°C to 40°C

Weight: 12 oz.

Voltages: 120V (110V~130V),  
220V (200V~250V),  
277V

When used in a 5" or 6" recessed can a de-rated 10W light is required.  
When used in a 4" recessed can a de-rated 8W light is required.

CE /C-Tick rated




**3-Year Warranty**

**Performance:**

*enLux RYgB LED Light for general illumination is powered by its proprietary, patented Solid State C.O.B. Light Engine coupled with its unique patented thermal management components providing high efficacy and maximum energy efficiency - 14 Watts typical.*


*The enLux R-30 Series LED Light aluminum housing is finished in a ultra durable top coat, will not shatter or break when dropped. Safe, cool to touch, 100% recyclable (no mercury or hazardous materials).*





R30S Down Light Photometrics

0 ft	Illuminance Distribution Ratio					
3 ft	-	-	-	-	0.015	1.000
6 ft	-	-	-	0.004	0.090	0.250
9 ft	-	-	0.002	0.008	0.084	0.111
12 ft	-	0.001	0.003	0.023	0.055	0.063
15 ft	0.001	0.001	0.019	0.024	0.038	0.040
	15 ft	12 ft	9 ft	6 ft	3 ft	CL

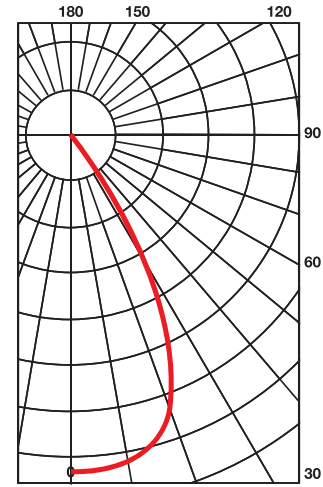

R30S Illuminance at Beam Centerline

White	CCT	P/N	Total Lumen	Throw Distance (feet)				
				3	6	9	12	15
Warm	2700°K	0111X1	679	965.2	241.3	107.2	60.3	38.6
Neutral	3500°K	0113X1	683	970.0	242.5	107.7	60.6	38.8
Cool	4500°K	0114X1	704	1000.8	250.2	111.2	62.5	40.0

Unit in lux  
1 lux = 0.0929 footcandle (fc)

R30S White E26/E27 Base

Product Code	White Light CCT	Voltage	Fin Color
<b>01</b> E26/E27	<b>11</b> Warm (2700°K)	<b>0</b> 120V (110V~130V)	<b>0</b> White*
	<b>13</b> Neutral (3500°K)	<b>2</b> 220V (200V~250V)	<b>1</b> Black
	<b>14</b> Cool (4500°K)	<b>3</b> 120V BR	<b>2</b> Silver*
		<b>7</b> 277V	

\*Special Order Only

Examples

<b>011101</b>	R30 Spotlight	E26/E27	Warm (2700°K)	120V	Black Fin
<b>011300</b>	R30 Spotlight	E26/E27	Neutral (3500°K)	120V	White Fin
<b>011422</b>	R30 Spotlight	E26/E27	Cool (4500°K)	220V	Silver Fin

