

Fin color:



White

Line Voltage

R-30 W
160 degree beam

⚡ 120V / 220V / 277V line current

Medium Screw Base E26/E27

50,000 hour rated life

Replaces:

100W Incandescent /
26W Compact Fluorescent

Par 30 LED Lamp

14 Watt typical

Light Output

795-810 Lumen (useful)

Indoor/Outdoor
wet and dry locations

White (3) Color Temperatures:

- Warm** White (2700K)
- Neutral** White (3500K)
- Cool** White (4500K)

Operating:

Open Air Fixtures -4°F to 105°F
-20°C to 40°C

Weight: 9 oz.

Voltages: 120V (110V~130V),
220V (200V~250V),
277V

When used in a 5" or 6" recessed can a de-rated 10W light is required.
When used in a 4" recessed can a de-rated 8W light is required.

CE /C-Tick rated



3-Year Warranty

Performance:

enLux RYgB LED Light for general illumination is powered by its proprietary, patented Solid State C.O.B. Light Engine coupled with its unique patented thermal management components providing high efficacy and maximum energy efficiency - 14 Watts typical.

*The enLux R-30 Series LED Light aluminum housing is finished in a ultra durable top coat, will not shatter or break when dropped. Safe, cool to touch, 100% recyclable (no mercury or hazardous materials)**.*



*** California Title 22 compliant*





R30W Down Light Photometrics

0 ft	Illuminance Distribution Ratio					
3 ft	0.002	0.008	0.024	0.088	0.370	1.000
6 ft	0.012	0.022	0.045	0.093	0.176	0.250
9 ft	0.015	0.026	0.041	0.064	0.093	0.111
12 ft	0.016	0.023	0.032	0.044	0.056	0.063
15 ft	0.015	0.020	0.025	0.031	0.038	0.040
	15 ft	12 ft	9 ft	6 ft	3 ft	CL

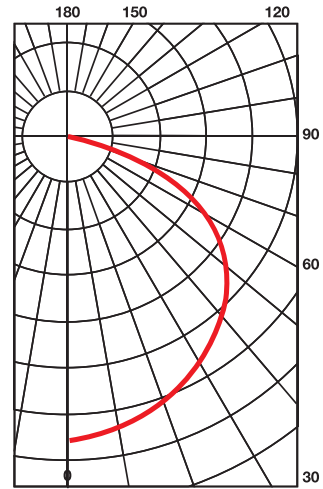

R30W Illuminance at Beam Centerline

White	CCT	P/N	Total Lumen	Throw Distance (feet)				
				3	6	9	12	15
Warm	2700°K	0211X1	805	252.1	63.0	28.0	15.8	10.1
Neutral	3500°K	0213X1	810	253.7	63.4	28.2	15.9	10.2
Cool	4500°K	0214X1	794	249.0	62.3	27.7	15.6	9.9

Unit in lux
1 lux = 0.0929 footcandle (fc)

R30W White E26/E27 Base

Product Code	White Light CCT	Voltage	Fin Color
02 E26/E27	11 Warm (2700°K)	0 120V (110V~130V)	0 White
	13 Neutral (3500°K)	2 220V (200V~250V)	
	14 Cool (4500°K)	3 120V BR	
		7 277V	

Examples

021100	R30 Wide Floodlight	E26/E27	Warm (2700°K)	120V	White Fin
021320	R30 Wide Floodlight	E26/E27	Neutral (3500°K)	220V	White Fin

