


Aluminum surface with Trim color:



Line Voltage

DL2e-DC

60 degree beam
 42 watts standard
 (de-rated wattage available)

120Vac or 277Vac line voltage, self-selected

Junction Box*, IC Rated

Phase cut dimmable
 0-10V dimming (Optional)

50,000 hours rated life

5 Year Warranty

Suitable for Dry or Damp Location

When ordering for damp location, request the lens to be sealed.

Operating Temperatures:

-40°F to 106°F
 -40°C to 40°C

White	CCT	CRI	Input Power (W)	Lumen Output (120V/277V)	eff (lm/w) (120V/277V)	Power Factor (120V/277V)
Soft	2700K	81	42	3660 / 3750	87 / 89	100 / 93
Warm	3000K	82	42	3700 / 3775	88 / 90	100 / 93
Neutral	3500K	83	42	3700 / 3775	88 / 90	100 / 92
Cool	4000K	83	42	3780 / 3830	90 / 91	100 / 93
Daylight	5000K	82	42	3950 / 4010	94 / 96	100 / 93



3500K	Standard Frosted Lens	
Input Power (W)	Lumen Output	Eff (lm/w)
42	3780	90
38	3500	92
34	3200	94

Mounting:
IC Rated - Mounts to sheet rock or drop ceiling 9" ~ 10.5" hole

Application:
 Commercial & Residential

Weight: 3.7 lbs

Performance:

The **DL2e-DC Downlight** is powered by a **MCOB (Multi-Chip-On-Board)** light engine. enLux's proprietary thermal management enables the LED emitter to operate at the lowest possible junction temperature which ensures long life and excellent efficacy. A unique **Osram Duris E5** LED emitter is employed for the production of the engine.

The enLux **DL2e-DC Down Light** aluminum housing is finished in an ultra-durable top coat, safe, cool-to-the-touch, 100% recyclable (no mercury or hazardous materials)**.


*California Title 24 compliant, **California Title 22 compliant





DL2e-DC 42W Down Light Photometrics

0 ft	Illuminances Distribution Ratio					
3 ft					0.019	1.000
6 ft				0.005	0.095	0.250
9 ft			0.002	0.020	0.072	0.111
12 ft	0.001	0.007	0.024	0.049	0.063	
15 ft	0.001	0.003	0.010	0.021	0.034	0.040
	15 ft	12 ft	9 ft	6 ft	3 ft	CL

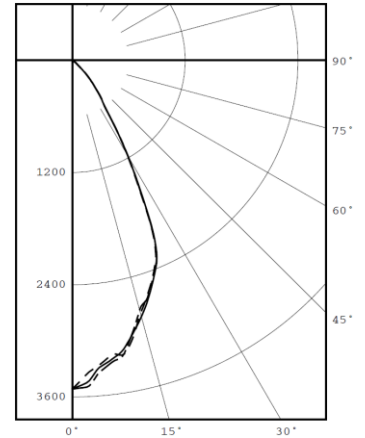


Candle Power Distribution

DL2e-DC 42W Illuminance at Beam Centerline

CCT	P/N	Total	Throw Distance (feet)				
			6	9	12	18	24
2700K	86130X	3750	112.3	49.9	28.0	12.5	7.1
3000K	86230X	3775	113.0	50.2	28.2	12.6	7.1
3500K	86330X	3775	113.0	50.2	28.2	12.6	7.1
4000K	86430X	3830	114.7	51.0	28.6	12.8	7.2
5000K	86430X	4010	120.1	53.4	30.0	13.7	7.5

Unit in foot-candle (fc), 1 fc = 10.76 lux

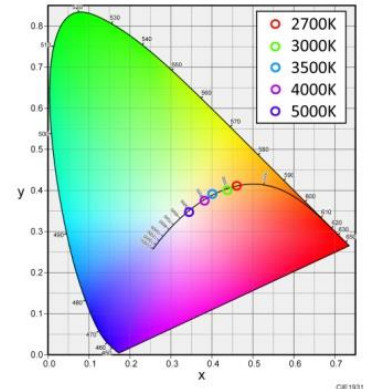

Product Code	White CCT	Input Power	Control	Kit Type	Trim Color
8	60 2600K	3 42W (De-rated Wattage Available)	0 Without 0-10V Dimming 1 With 0-10V Dimming	5 10" Flange Mounted Deep Cone Trim	WF White (Flat (Paint)) CA Clear Anodized
	61 2700K				
	62 3000K				
	63 3500K				
	64 4000K				
	65 5000K				
66 4500K					
Examples					
863305-CA	DL2e Down Light	3500K	42W	120V/277V	10" Flange Mounted Clear Anodized Deep Cone Trim
866305-WF	DL2e Down Light	4500K	42W	120V/277V	10" Flange Mounted White (Flat Paint) Deep Cone Trim