



Aluminum surface
with Trim color:



DL2c-TC-28W
Circadian Lighting Downlight
CCT Tunable
Dimmable
80 degree beam

Line Voltage 120Vac or 277Vac line voltage self-selected

50,000 hours rated life

5 Year Warranty

Suitable for Dry or Damp Location

When ordering for damp location, request the lens to be sealed.

Operating Temperatures:

-40°F to 106°F
-40°C to 40°C

LOW CCT	HIGH CCT	Dimming Level (%)	Input Power (W)	Useful Lumen (120V/277V)	Eff (lm/w) (120V/277V)	Power Factor (120V/277V)
		100	28	2700 / 2755	96.5 / 98.4	100 / 93
2700K	6500K	75	19	1830 / 1900	96.2 / 100	100 / 92
		50	12	1120 / 1210	93.3 / 101	97 / 82
		25	6	456 / 540	76 / 90	88 / 60



Mounting:
IC Rated - Mounts to sheet rock or drop ceiling 8", 10", 12" or 14" hole

Application:
Commercial & Residential

Weight: 2.7 lbs

Performance:

The **DL2c-TC Downlight** is powered by a **MCOB (Multi-Chip-On-Board)** light engine. enLux's proprietary thermal management enables the LED emitter to operate at the lowest possible junction temperature which ensures long life and excellent efficacy. A unique **Osram Duris S5** LED emitter is employed for the production of the engine.

The **enLux DL2c-TC Downlight** aluminum housing is finished in an ultra-durable top coat, safe, cool-to-the-touch, 100% recyclable (no mercury or hazardous materials)**.


*California Title 24 compliant, **California Title 22 compliant





DL2c-TC 28W Down Light Photometrics


0 ft	Illuminances Distribution Ratio					
3 ft			0.003	0.196	1.000	
6 ft			0.008	0.049	0.195	0.250
9 ft	0.002	0.007	0.022	0.059	0.113	0.111
12 ft	0.005	0.012	0.026	0.049	0.069	0.063
15 ft	0.008	0.015	0.025	0.037	0.045	0.040
15 ft	12 ft	9 ft	6 ft	3 ft	CL	

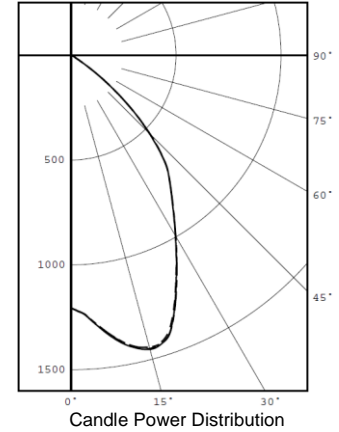

DL2c-TC 28W 277V 2700K~6500K Illuminance at Beam Centerline

CCT	Total Lumen	Throw Distance (feet)				
		6	9	12	18	24
2700K	2670	46.3	20.5	11.6	5.1	2.9
3500K	2730	47.2	21.0	11.9	5.2	3.0
4500K	2740	47.2	21.0	11.9	5.2	3.0
5500K	2950	51.1	22.6	12.8	5.6	3.2
6500K	2875	49.8	22.1	12.5	5.5	3.1

Unit in foot-candle (fc), 1 fc = 10.76 lux

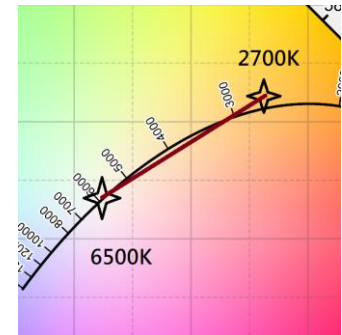

Product code	LOW CCT	HIGH CCT	Power	Control	Trim Type/ Configuration	Trim Color
7	0 2400K	4 4500K	2 28W	0 Two 0-10V 1 DALI Type 8 9 Custom	0 Tapered Cone 8"/ Drop Ceiling	WF White (flat paint)
	1 2700K	5 5000K			1 Tapered Cone 10"/ Drop Ceiling	BF Black (flat paint)
	2 3000K	6 5500K			2 Tapered Cone 8"/ Sheet Rock Ceiling	CA Clear Anodized
	3 3500K	7 6000K			3 Tapered Cone 10"/ Sheet Rock Ceiling	BA Black Anodized
	9 Custom	8 6500K			7 Tapered Cone 12"/ Sheet Rock Ceiling	AW Clear Anodized w/ White Ring
		9 Custom				

Examples

718201-WF	DL2c Downlight	2700K~6500K	28W @ 120V/277V	Tapered Cone 10"/ Drop Ceiling	White (flat paint) Trim
705217-CA	DL2c Downlight	2400K~5000K	28W @ 120V/277V	Tapered Cone 12"/ Sheet Rock Ceiling	Clear Anodized Trim